



A RIPLEY® BRAND

NEW

MB04

“Twister” Flat Drop Cable Slitter

Patent-pending design slits both sides of flat drop cable jackets on end or mid-span applications, and allows for precise, safe and easy access to fiber buffer tube.

Features

- Unique articulating hinge allows accurate end **AND** mid-span stripping without disassembling the tool — simply close the tool over the cable and pull to slit jacket
- Shielded blades promote safe operation and prevent cuts and lacerations
- Ergonomic design with convenient opening tabs fits comfortably in hand and requires minimal effort to use
- Comes with two installed reversible blades plus two additional replacement blades stowed conveniently in tool
- Lightweight and durable polymer construction




Additional Information

| MODEL | PART # | ITEM DESCRIPTION | CABLE COMPATIBILITY | CABLE WIDTH | CABLE HEIGHT | JACKET THICKNESS |
|-------|-----------|--|--|--------------------------------------|--------------------------------------|-------------------------------------|
| MB04 | MB04-7000 | Flat Drop Slitter with 2 Installed Blades and 2 Spare Blades | Commscope® Corning Draka/Comteq OFS | 0.305" - 0.350" (7.7 mm - 8.9 mm) | 0.155" - 0.185" (3.9 mm - 4.7 mm) | 0.03" - 0.04" (0.76 mm - 1.0 mm) |
| | MB04-7500 | Replacement Blade Kit with 4 Reversible Blades | Prysmian Superior Essex | | | |




Hinged design opens to accept cable for end and mid-span applications without disassembling tool.

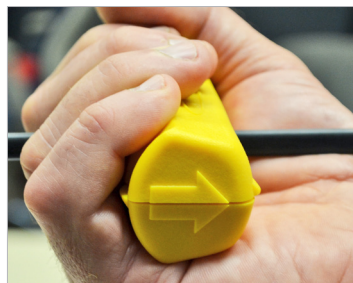

Close the tool onto the cable and pull in the direction of the arrow; clamps tightly — no latch required.



Precision blades easily cut through jacket without damaging fiber.

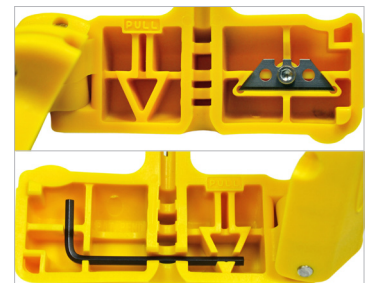

Spare blades and an installation tool stored conveniently within the tool.

For more information or to locate the nearest authorized Ripley® distributor, please visit www.ripley-tools.com or call 1 (800) 528-8665 to speak to a customer service representative.





A RIPLEY® BRAND

Make Cable Preparation Easier

With Additional Ripley® Products



CFS-3

3-Hole Fiber Optic Wire Stripper

- Three hole design efficiently removes 1.6 mm to 3 mm fiber jackets & buffers down to the 125 micron bare fiber
- Manufactured to precise tolerances to ensure clean, smooth strips every time
- Compliant & comfortable thermoplastic elastomer handle grips

| MODEL | PART # | WIRE SIZE Ø |
|-------|--------|-------------|
| CFS-3 | 81300 | 1.6 to 3 mm |



KS-1

Fiber Optic Kevlar® Shears

- Ideal for cutting Kevlar® strength fibers in fiber optic cable
- Lightweight & ergonomic design
- Micro-serrated blade reduces slippage for precise cuts

| MODEL | PART # | ITEM DESCRIPTION |
|-------|--------|---|
| KS-1 | 80671 | Fiber Optic Kevlar® Shears |
| KS-1 | 80665 | Fiber Optic Kevlar® Shears & Nylon Carrying Pouch |



FTS Series

Fiber Tube Scorers

- Precise, one-step buffer tube scorer
- Fixed, hardened carbon steel blade requires no adjustments
- FTS body comprised of strong & resilient acetal polymer

| MODEL | PART # | TUBE SIZE | WALL THICK. |
|-------------------|--------|-----------------------------------|-------------------------------------|
| FTS-005 (Red) | 80990 | Up to 0.079" Up to 2 mm | 0.005" to 0.010" 0.13 to 0.25 mm |
| FTS (Yellow) | 80980 | 0.062" to 0.236" 1.6 to 6.0 mm | 0.010" to 0.020" 0.25 to 0.50 mm |
| FTS-035 (Blue) | 80985 | 0.062" to 0.236" 1.6 to 6.0 mm | 0.039" to 0.051" 1.0 to 1.3 mm |



RCS-114 & RCS-158

Round Cable Strippers

- Designed for fast, safe & precise removal of PE, PVC, rubber & other jacket materials
- Spring-loaded cable brace firmly secures cable against the blade for controlled cutting action
- Durable blade performs rotary & spiral type cuts

| MODEL | PART # | CABLE SIZE Ø |
|---------|--------|-----------------------------------|
| RCS-114 | 37140 | 0.178" to 1.14" 4.5 to 29.0 mm |
| RCS-158 | 37145 | 0.75" to 1.58" 19.0 to 40.0 mm |
| CB231 | 37150 | Replacement Blade |

LIT-ML-0003 REV. A

