



MB11

RocketRibbon Armored Shaving Tool

Shaves access window to steel strength members for use with attachment cleats and to provide easy access to FastAccess sections.



Features

- Ergonomic handle for reduced fatigue and easier force generation
- L-Bracket to apply clamping force on cable, ensuring a reliable cut
- Use wing-knob to adjust cable setting, **NO SCREWDRIVER NECESSARY!**
- Spacer barrel accurately aligns tool for optimum shaving angle
- Tool-free blade replacement with captive hardware, **NO SCREWDRIVER NECESSARY!**
- Offset block allows blade to be reversed for double blade life. (2X)
- **Compatible with standard Utility Knife Blades**
- Machined Aluminium construction for unmatched ruggedness and longevity

Part #	Item description	Cable compatibility	Cable size
MB11-7000	RocketRibbon Armored Shaving Tool	Corning RocketRibbon 48F & under - RocketRibbon 864F	0.33" - 0.87" (8.38mm - 22.1mm)
		Thick walled tube, thin walled microduct. Compatibility is best tested on sample cable	0.25" - 1.0" (6mm - 25mm)

Open the tool by releasing the yellow wing-knob, no tool required	Set the tool on the cable, using the spacing barrel to set the optimal blade angle	Draw the tool down the cable, opening an access window to the strength member	The shaving operation only uses half the blade. Flip the blade for double blade life. Release the thumb knob to slide the blade out. No tool required. Compatible with standard utility knife blades

For more information or to locate your nearest authorized Ripley® distributor, visit www.ripley-tools.com or call **1 (800) 528-8665** to speak with a customer service representative.



A proud member of the Hubbell family.



MB11-7000



WARNING! THIS TOOL SHOULD NOT BE USED ON LIVE ELECTRICAL CIRCUITS. IT IS PROTECTED AGAINST ELECTRICAL SHOCK!

Always use OSHA/ANSI/CE or other industry approved eye protection when using tools. This tool is not to be used for purposes other than intended. Read carefully and understand instructions before using this tool.

Warranty: Ripley warrants its products against materials and workmanship for a period of two years from date of shipment from the Ripley factory provided is utilized in accordance with instructions and specified ratings.

Product Overview



The MB11 series tool is designed to shave the jacket from the surface of the strength members on RocketRibbon Armored Cables. This is necessary to expose the strength members for connection to mounting cleats on endstrip applications. It is also necessary to expose the strength members for midspan operations, to access the FastAccess section of the cable.

Features

- Ergonomic handle for reduced fatigue and easier force generation
- L-Bracket to apply clamping force on cable, ensuring a reliable cut
- Spacer barrel, accurately aligns tool for optimum shaving angle
- Tool-free blade replacement with captive hardware
- Offset block allows blade to be reversed for double blade life
- Compatible with standard Utility Knife Blades

Operation Instructions

1. Locate the strength members inside the cable
 2. Open tool bracket by loosening the yellow wing-knob
 3. Place tool on cable, with blade directly on the strength member location
 4. Close tool on cable, squeezing directly behind the block and under the bracket
 5. Tighten wing-knob to set the tool for the cable diameter
 6. Pull the tool down the cable for the length of the desired strip
 7. Repeat steps on opposite side of cable for the other strength member
- A. To swap the blade, use the black knob to release the pressure on the blade
- B. Slide the blade out of the side marked with the arrow
- C. Flip blade to use the undamaged portion of the blade edge

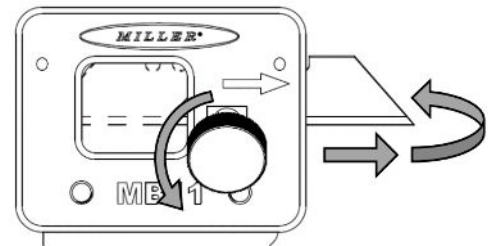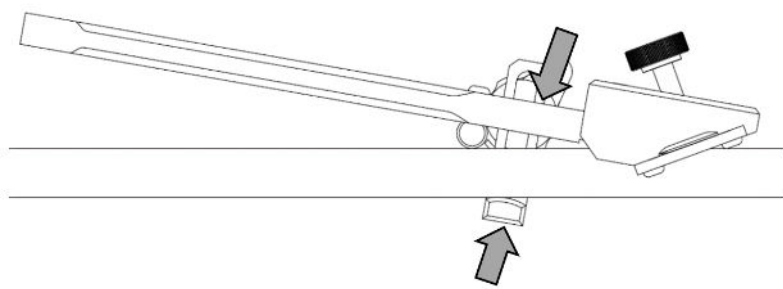

For more information or to locate your nearest authorized Ripley® distributor, visit www.ripley-tools.com or call **1 (800) 528-8665** to speak with a customer service representative.



A proud member of the Hubbell family.